

# Product datasheet

Specifications



## module XPS-MP - 2 independent functions - 24 V DC

XPSMP11123P

! Discontinued on: 16 Jan 2024

! Discontinued

### Main

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range Of Product          | Preventa Safety automation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Product Or Component Type | Safety controller with pre-defined function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Safety Module Name        | XPSMP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Safety Module Application | 2 independent functions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Safety Use Category       | Category 4 maximum conforming to EN/IEC 60954-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Type Of Start             | Automatic or unmonitored (configuration 1)<br>Automatic or unmonitored (configuration 10)<br>Automatic or unmonitored (configuration 11)<br>Automatic or unmonitored (configuration 14)<br>Automatic or unmonitored (configuration 3)<br>Automatic or unmonitored (configuration 5)<br>Automatic or unmonitored (configuration 7)<br>Monitored (configuration 12)<br>Monitored (configuration 13)<br>Monitored (configuration 15)<br>Monitored (configuration 2)<br>Monitored (configuration 4)<br>Monitored (configuration 6)<br>Monitored (configuration 8)<br>Monitored (configuration 9) |
| Checks                    | Configuration (configuration 10)<br>Configuration (configuration 13)<br>Configuration (configuration 3)<br>Configuration (configuration 4)<br>Configuration (configuration 5)<br>Configuration (configuration 6)<br>Configuration (configuration 9)                                                                                                                                                                                                                                                                                                                                          |
| Standards                 | DIN V VDE 801 + A1<br>EN/IEC 60204-1<br>EN/IEC 60947-1 + A11<br>EN/IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Product Certifications    | UL<br>BIA<br>CSA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| [Us] Rated Supply Voltage | 24 V DC - 20...20 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connections - Terminals | Captive screw clamp terminals, removable terminal block solid cable: 0.2...1 mm² without cable end, 2 wires<br>Captive screw clamp terminals, removable terminal block flexible cable: 0.2...1.5 mm² without cable end, 2 wires<br>Captive screw clamp terminals, removable terminal block flexible cable: 0.2...2.5 mm² without cable end, 1 wire<br>Captive screw clamp terminals, removable terminal block solid cable: 0.2...2.5 mm² without cable end, 1 wire<br>Captive screw clamp terminals, removable terminal block flexible cable: 0.25...1 mm² with cable end, without bezel, 2 wires<br>Captive screw clamp terminals, removable terminal block flexible cable: 0.25...2.5 mm² with cable end, with bezel, 1 wire<br>Captive screw clamp terminals, removable terminal block flexible cable: 0.25...2.5 mm² with cable end, without bezel, 1 wire<br>Captive screw clamp terminals, removable terminal block flexible cable: 0.5...1.5 mm² with cable end, with double bezel, 2 wires |
| Safety Level            | Can reach PL e/category 4 conforming to EN/ISO 13849-1<br>Can reach SIL 3 conforming to EN/IEC 62061                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## Complementary

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function Of Module                  | Configuration 0: functions disabled (factory setting)<br>Configuration 1: emergency stop monitoring 1-channel wiring, category 2<br>Configuration 10: enabling grip switch monitoring (3-position switch), category 4<br>Configuration 11: sensing mat and edges monitoring, category 3<br>Configuration 12: sensing mat and edges monitoring, category 3<br>Configuration 13: relay output safety light curtain monitoring, category 4<br>Configuration 14: coded magnetic switch monitoring, category 4<br>Configuration 15: coded magnetic switch monitoring, category 4<br>Configuration 2: emergency stop monitoring 1-channel wiring, category 2<br>Configuration 3: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4<br>Configuration 4: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4<br>Configuration 5: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4<br>Configuration 6: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4<br>Configuration 7: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4<br>Configuration 8: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4<br>Configuration 9: guard monitoring for injection presses and blowing machines, category 4 |
| Synchronisation Time Between Inputs | 0.5 s (configuration 13)<br>1.5 s (configuration 14)<br>1.5 s (configuration 15)<br>1.5 s (configuration 5)<br>1.5 s (configuration 6)<br>1.5 s (configuration 9)<br>Unlimited (configuration 3)<br>Unlimited (configuration 4)<br>Unlimited (configuration 7)<br>Unlimited (configuration 8)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Maximum Power Consumption In W      | 5 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Input Protection Type               | Internal, electronic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| [Uc] Control Circuit Voltage        | 24 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Maximum Line Resistance             | 100 Ohm <2000 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Number Of Safety Circuits           | 3 NO relays per function (6 NO total), volt-free                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Number Of Additional Circuits       | 3 solid state outputs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Breaking Capacity                   | 180 VA holding AC-15 C300 relay output<br>1800 VA inrush AC-15 C300 relay output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Breaking Capacity                   | 20 mA at 24 V for static output circuit<br>1.5 A at 24 V (DC-13) time constant: 50 ms for relay output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Output Thermal Current              | 2 A for 1 output and 4 A for the other 2 outputs for relay<br>3.3 A for all 3 outputs relay simultaneously<br>6 A for 1 output and 2 A for the other 2 outputs for relay                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

|                                             |                                                                                                                                                                       |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [Ith] Conventional Free Air Thermal Current | 20 A                                                                                                                                                                  |
| Associated Fuse Rating                      | 4 A gG for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200<br>6 A fast blow for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200 |
| Minimum Output Current                      | 10 mA for relay output                                                                                                                                                |
| Minimum Output Voltage                      | 17 V for relay output                                                                                                                                                 |
| Maximum Response Time On Input Open         | 30 ms                                                                                                                                                                 |
| [Ui] Rated Insulation Voltage               | 300 V (pollution degree 2) conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2                                                                                   |
| [Uimp] Rated Impulse Withstand Voltage      | 4 kV overvoltage category III conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2                                                                                |
| Local Signalling                            | 12 LEDs                                                                                                                                                               |
| Mounting Support                            | 35 mm symmetrical DIN rail                                                                                                                                            |
| Depth                                       | 114 mm                                                                                                                                                                |
| Height                                      | 99 mm                                                                                                                                                                 |
| Width                                       | 45 mm                                                                                                                                                                 |
| Net Weight                                  | 0.32 kg                                                                                                                                                               |

## Environment

|                                       |                                      |
|---------------------------------------|--------------------------------------|
| Ip Degree Of Protection               | IP20 (terminals)<br>IP40 (enclosure) |
| Ambient Air Temperature For Operation | -10...55 °C                          |
| Ambient Air Temperature For Storage   | -25...85 °C                          |

## Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type Of Package 1       | PCE     |
| Number Of Units In Package 1 | 1       |
| Package 1 Height             | 6.2 cm  |
| Package 1 Width              | 16 cm   |
| Package 1 Length             | 11.7 cm |
| Package 1 Weight             | 443 g   |
| Unit Type Of Package 2       | S03     |
| Number Of Units In Package 2 | 20      |
| Package 2 Height             | 30 cm   |
| Package 2 Width              | 30 cm   |
| Package 2 Length             | 40 cm   |
| Package 2 Weight             | 9.62 kg |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

Well-being performance

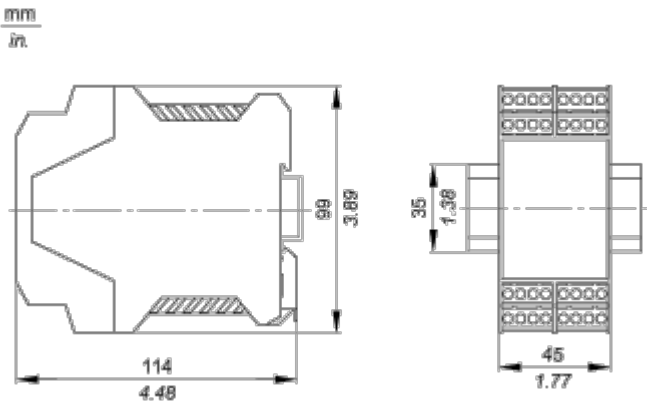
|   |                            |     |
|---|----------------------------|-----|
| ✓ | Mercury Free               |     |
| ✓ | Rohs Exemption Information | Yes |
| ✓ | Pvc Free                   |     |

Certifications & Standards

|                          |                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Reach Regulation         | <a href="#">REACH Declaration</a>                                                                                           |
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)                                                                  |
| China Rohs Regulation    | <a href="#">China RoHS declaration</a>                                                                                      |
| Environmental Disclosure | <a href="#">Product Environmental Profile</a>                                                                               |
| Weee                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile      | <a href="#">End of Life Information</a>                                                                                     |

Dimensions Drawings

Dimensions



Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

Discover XPSAC5121 by

• Characteristics

• Dimensions Drawings

• Connections and Schema

• Technical Description

• **Download & Documents**



**XPSAC5121**  
module XPSAC - Emergency stop - 24 V AC DC

 **Download XPSAC5121 product datasheet**

Download & Documents 1 to 3 of 3 (Total: -1)

Instruction sheet

XPSAC... Safety module for emergency stop and switch monitoringEnglish 2012-07-04pdf (29k)

Image of product

Emergency stop and switch monitoring2010-11-10(Select :)

Certificate

Russian certificateEnglish 2010-07-07pdf (60k)

1

2

1 Click on **Download & Documents**.

2 Click on **Instruction sheet**.



6

Life Is On | Schneider Electric

17 May 2024

Technical Description

Safety Functions

|                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <ul style="list-style-type: none"><li>• Emergency stop monitoring, 1 channel wiring:<ul style="list-style-type: none"><li>◦ 1 channel Emergency stop, automatic or unmonitored start.</li><li>◦ 1 channel Emergency stop, monitored start.</li></ul></li><li>• Emergency stop monitoring, 2 channel wiring:<ul style="list-style-type: none"><li>◦ 2 channel Emergency stop, automatic or unmonitored start.</li><li>◦ 2 channel Emergency stop, monitored start.</li></ul></li></ul>                                                                                                                |
|    | <ul style="list-style-type: none"><li>• Coded magnetic switch monitoring:<ul style="list-style-type: none"><li>◦ Automatic or unmonitored start, synchronization time = 1,5 s.</li><li>◦ Monitored start, synchronization time = 1,5 s.</li></ul></li></ul>                                                                                                                                                                                                                                                                                                                                          |
|   | <ul style="list-style-type: none"><li>• Guard monitoring with start test:<ul style="list-style-type: none"><li>◦ Locking of guard with start test, automatic or unmonitored start.</li><li>◦ Locking of guard with start test, monitored start.</li></ul></li><li>• Guard monitoring with start test and synchronization time = 1,5 ms:<ul style="list-style-type: none"><li>◦ Locking of guard with start test, automatic or unmonitored start.</li><li>◦ Locking of guard with start test, monitored start.</li></ul></li><li>• Guard monitoring for injection press or blowing machine.</li></ul> |
|  | <ul style="list-style-type: none"><li>• Enabling switch monitoring, safety mat monitoring:<ul style="list-style-type: none"><li>◦ Enabling switch monitoring, with or without start-up preparation.</li><li>◦ Safety mat monitoring, automatic or unmonitored start.</li></ul></li></ul>                                                                                                                                                                                                                                                                                                             |
|  | <ul style="list-style-type: none"><li>• Sensing mat monitoring, monitored start.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



- Light curtain monitoring, monitored start, synchronization time = 0,5 s.