Product datasheet

Specification





passive connection sub-base ABE7 - 16 inputs or outputs

ABE7H16R50

Main

| Range Of Product | Modicon ABE7 | |
|--------------------------------|---|--|
| Product Or Component Type | Passive discrete I/O sub-base | |
| Sub-Base Type | I/O sub-base | |
| [Us] Rated Supply Voltage | 1930 V conforming to IEC 61131-2 | |
| Number Of Channels | 16 | |
| Number Of Terminal Per Channel | 1 | |
| Connections - Terminals | Screw type terminals, 1 x 0.091 x 1.5 mm² (AWG 28AWG 16) flexible with cable end Screw type terminals, 1 x 0.141 x 2.5 mm² (AWG 26AWG 12) solid Screw type terminals, 1 x 0.141 x 2.5 mm² (AWG 26AWG 14) flexible without | |
| | cable end Screw type terminals, $2 \times 0.092 \times 0.75 \text{ mm}^2$ (AWG 28AWG 20) flexible with cable end | |
| | Screw type terminals, 2 x 0.22 x 2.5 mm² (AWG 24AWG 14) solid | |

Complementary

| Supply Voltage Type | DC |
|--------------------------------------|---|
| Number Of Horizontal Rows | 2 |
| Status Led | 1 LED (green) power ON |
| Polarity Distribution | No |
| Short-Circuit Protection | 2 A internal fuse, 5 x 20 mm, fast blow (PLC end) |
| Connector Type | HE-10 |
| Pin Number | 20 pins |
| Fixing Mode | By clips (35 mm symmetrical DIN rail) By screws (solid plate with fixing kit) |
| Maximum Supply Current | 1.8 A |
| Current Per Channel | 0.5 A |
| Maximum Current Per Output Common | 1.8 A |
| Voltage Drop On Power Supply Fuse | 0.3 V |
| [Ui] Rated Insulation Voltage | 2000 V |
| Installation Category | II conforming to IEC 60664-1 |
| Tightening Torque | 0.6 N.m with flat Ø 3.5 mm screwdriver |
| Width | 84 mm |
| Net Weight | 0.196 kg |

Environment

| Product Certifications | DNV UL CSA GL EAC |
|--|--|
| | LAC |
| Ip Degree Of Protection | IP2X conforming to IEC 60529 |
| Resistance To Incandescent Wire | 750 °C conforming to IEC 60695-2-11 |
| Shock Resistance | 15 gn for 11 ms conforming to IEC 60068-2-27 |
| Vibration Resistance | 2 gn (f= 10150 Hz) conforming to IEC 60068-2-6 |
| Resistance To Electrostatic Discharge | 4 kV (contact) level 3 conforming to IEC 61000-4-2 8 kV (air) level 3 conforming to IEC 61000-4-2 |
| Resistance To Radiated Fields | 10 V/m (260000001000000000 Hz) conforming to IEC 61000-4-3 level 3 |
| Resistance To Fast Transients | 2 kV level 3 conforming to IEC 61000-4-4 |
| Ambient Air Temperature For Operation | -560 °C conforming to IEC 61131-2 |
| Ambient Air Temperature For Storage | -4080 °C conforming to IEC 61131-2 |
| Pollution Degree | 2 conforming to IEC 60664-1 |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|----------|
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 7.0 cm |
| Package 1 Width | 8.3 cm |
| Package 1 Length | 9.7 cm |
| Package 1 Weight | 217.0 g |
| Unit Type Of Package 2 | S03 |
| Number Of Units In Package 2 | 36 |
| Package 2 Height | 30.0 cm |
| Package 2 Width | 30.0 cm |
| Package 2 Length | 40.0 cm |
| Package 2 Weight | 8.194 kg |

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


| Reach Regulation | REACh Declaration |
|--------------------------|---|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile | End of Life Information |

Product datasheet

ABE7H16R50

Dimensions Drawings


Dimensions

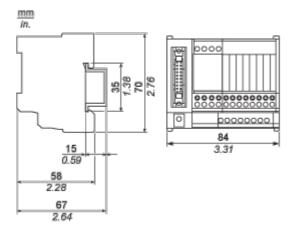

ABE7H16R50

Mounting and Clearance

Mounting

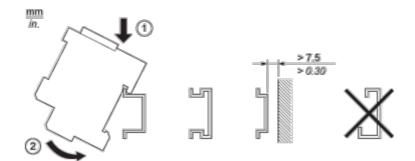


Product datasheet


ABE7H16R50

Connections and Schema

HE10 16 Channels



Wiring Diagrams

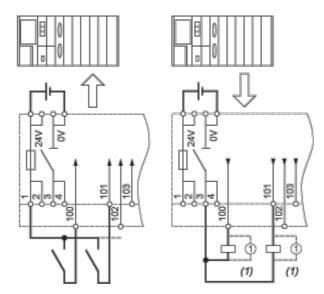


(1) Inductive load

Performance Curves

Curves for Determining Cable Type and Length According to the Current

16-channel Sub-base

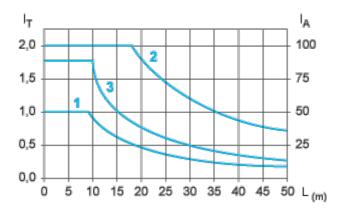

- L Cable length
- I_{T} Total current per sub base (A)
- I_A Average current per channel (mA)
- (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a. 0.08 mm² (AWG 28).
- (2) TSXCDP••3 cables with c.s.a. 0.34 mm² (AWG 22).
- (3) Cables with c.s.a. 0.13 mm² (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.