

# Product datasheet

Specifications



logic controller, Modicon M221, 16 IO, transistor, PNP, Ethernet, spring

TM221ME16TG

## Main

Range Of Product	Modicon M221
Product Or Component Type	Logic controller
[Us] Rated Supply Voltage	24 V DC
Discrete Input Number	8, discrete input 4 fast input conforming to IEC 61131-2 Type 1
Analogue Input Number	2 at 0...10 V
Discrete Output Type	Transistor
Discrete Output Number	8 transistor 2 fast output
Discrete Output Voltage	24 V DC
Discrete Output Current	0.5 A

## Complementary

Discrete I/O Number	16
Maximum Number Of I/O Expansion Module	7 (local I/O-Architecture) 14 (remote I/O-Architecture)
Supply Voltage Limits	20.4...28.8 V
Inrush Current	35 A
Maximum Power Consumption In W	22.9 W at 24 V (with max number of I/O expansion module) 4 W at 24 V (without I/O expansion module)
Power Supply Output Current	0.52 A 5 V for expansion bus 0.49 A 24 V for expansion bus
Discrete Input Logic	Sink or source (positive/negative)
Discrete Input Voltage	24 V
Discrete Input Voltage Type	DC
Analogue Input Resolution	10 bits
LSB Value	10 mV
Conversion Time	1 ms per channel + 1 controller cycle time for analogue input analog input
Permitted Overload On Inputs	+/- 30 V DC for 5 min (maximum) for analog input +/- 13 V DC (permanent) for analog input
Voltage State 1 Guaranteed	$\geq 15$ V for input
Voltage State 0 Guaranteed	$\leq 5$ V for input
Discrete Input Current	7 mA for discrete input 5 mA for fast input
Input Impedance	100 kOhm for analog input 3.4 kOhm for input 4.9 kOhm for fast input

<b>Response Time</b>	35 µs turn-off, I2...I5 terminal(s) for input 5 µs turn-on, I0, I1, I6, I7 terminal(s) for fast input 35 µs turn-on, other terminals terminal(s) for input 5 µs turn-off, I0, I1, I6, I7 terminal(s) for fast input 100 µs turn-off, other terminals terminal(s) for input 5 µs turn-on, turn-off, Q0...Q1 terminal(s) for output 50 µs turn-on, turn-off, Q2...Q3 terminal(s) for output 300 µs turn-on, turn-off, other terminals terminal(s) for output
<b>Configurable Filtering Time</b>	0 ms for input 3 ms for input 12 ms for input
<b>Discrete Output Logic</b>	Positive logic (source)
<b>Maximum Current Per Output Common</b>	4 A
<b>Output Frequency</b>	100 kHz for fast output (PWM/PLS mode) at Q0...Q1 5 kHz for output at Q2...Q3 0.1 kHz for output at Q4...Q6
<b>Absolute Accuracy Error</b>	+/- 1 % of full scale for analog input
<b>Maximum Leakage Current</b>	0.1 mA for transistor output
<b>Maximum Voltage Drop</b>	<1 V
<b>Mechanical Durability</b>	20000000 cycles for transistor output
<b>Maximum Tungsten Load</b>	<12 W for output and fast output
<b>Protection Type</b>	Short-circuit and overload protection with automatic reset Short-circuit protection on output Overload and short-circuit protection at 1 A
<b>Reset Time</b>	1 s automatic reset
<b>Memory Capacity</b>	256 kB for user application and data RAM with 10000 instructions 256 kB for internal variables RAM
<b>Data Backed Up</b>	256 kB built-in flash memory for backup of application and data
<b>Data Storage Equipment</b>	2 GB SD card (optional)
<b>Battery Type</b>	BR2032 or CR2032X lithium non-rechargeable
<b>Backup Time</b>	1 year at 25 °C (by interruption of power supply)
<b>Execution Time For 1 Kinstruction</b>	0.3 ms for event and periodic task 0.7 ms for other instruction
<b>Execution Time Per Instruction</b>	0.2 µs Boolean
<b>Exct Time For Event Task</b>	60 µs response time
<b>Application Structure</b>	1 cyclic auxiliary task 8 interrupt tasks 1 configurable freewheeling/cyclic master task
<b>Maximum Size Of Object Areas</b>	512 %M memory bits 255 %C counters 8000 %MW memory words 512 %KW constant words 255 %TM timers
<b>Realtime Clock</b>	With
<b>Clock Drift</b>	<= 30 s/month at 25 °C
<b>Regulation Loop</b>	Adjustable PID regulator up to 14 simultaneous loops
<b>Positioning Functions</b>	Position PTO 2 axe(s)pulse/direction mode (100 kHz) Position PTO 1 axe(s)CW/CCW mode (100 kHz)
<b>Function Available</b>	PLS Frequency generator PWM
<b>Counting Input Number</b>	4 fast input (HSC mode) at 100 kHz 32 bits

<b>Counter Function</b>	Pulse/direction A/B Single phase
<b>Integrated Connection Type</b>	USB port with mini B USB 2.0 connector Non isolated serial link serial 1 with RJ45 connector and RS232/RS485 interface Ethernet with RJ45 connector
<b>Supply</b>	(serial 1)serial link supply: 5 V, <200 mA
<b>Transmission Rate</b>	1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 480 Mbit/s for USB
<b>Communication Port Protocol</b>	USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network Ethernet
<b>Port Ethernet</b>	10BASE-T/100BASE-TX 1 port with 100 m copper cable
<b>Communication Service</b>	Ethernet/IP adapter Modbus TCP server Modbus TCP client Modbus TCP slave device DHCP client
<b>Local Signalling</b>	1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD) 1 LED (red) for BAT 1 LED per channel (green) for I/O state 1 LED (green) for SL Ethernet network activity (green) for ACT Ethernet network link (yellow) for Link (Link Status)
<b>Electrical Connection</b>	terminal block, 3 terminal(s) for connecting the 24 V DC power supply connector, 4 terminal(s) for analogue inputs Mini B USB 2.0 connector for a programming terminal removable spring terminal block, 10 terminal(s) for inputs removable spring terminal block, 11 terminal(s) for outputs
<b>Maximum Cable Distance Between Devices</b>	Shielded cable: <10 m for fast input Unshielded cable: <30 m for output Unshielded cable: <30 m for digital input Unshielded cable: <1 m for analog input Shielded cable: <3 m for fast output
<b>Insulation</b>	Between input and internal logic at 500 V AC Between fast input and internal logic at 500 V AC Non-insulated between inputs Between output and internal logic at 500 V AC Non-insulated between analogue input and internal logic Non-insulated between analogue inputs
<b>Marking</b>	CE
<b>Mounting Support</b>	Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 rail conforming to IEC 60715 plate or panel with fixing kit
<b>Height</b>	90 mm
<b>Depth</b>	70 mm
<b>Width</b>	70 mm
<b>Net Weight</b>	0.264 kg

## Environment

<b>Standards</b>	IEC 61131-2 UL 508 CAN/CSA C22.2 No. 213 IACS E10 ANSI/ISA 12-12-01
------------------	---

<b>Product Certifications</b>	LR ABS cULus DNV-GL EAC RCM CE UKCA cULus HazLoc
<b>Environmental Characteristic</b>	Ordinary and hazardous location
<b>Resistance To Electrostatic Discharge</b>	8 kV in air conforming to IEC 61000-4-2 4 kV on contact conforming to IEC 61000-4-2
<b>Resistance To Electromagnetic Fields</b>	10 V/m 80 MHz...1 GHz conforming to IEC 61000-4-3 3 V/m 1.4 GHz...2 GHz conforming to IEC 61000-4-3 1 V/m 2...2.7 GHz conforming to IEC 61000-4-3
<b>Resistance To Magnetic Fields</b>	30 A/m 50/60 Hz conforming to IEC 61000-4-8
<b>Resistance To Fast Transients</b>	2 kV (power lines) conforming to IEC 61000-4-4 2 kV (relay output) conforming to IEC 61000-4-4 1 kV (I/O) conforming to IEC 61000-4-4 1 kV (Ethernet line) conforming to IEC 61000-4-4 1 kV (serial link) conforming to IEC 61000-4-4
<b>Surge Withstand</b>	2 kV power lines (AC) common mode conforming to IEC 61000-4-5 2 kV relay output common mode conforming to IEC 61000-4-5 1 kV I/O common mode conforming to IEC 61000-4-5 1 kV shielded cable common mode conforming to IEC 61000-4-5 0.5 kV power lines (DC) differential mode conforming to IEC 61000-4-5 1 kV power lines (AC) differential mode conforming to IEC 61000-4-5 1 kV relay output differential mode conforming to IEC 61000-4-5 0.5 kV power lines (DC) common mode conforming to IEC 61000-4-5
<b>Resistance To Conducted Disturbances</b>	10 V 0.15...80 MHz conforming to IEC 61000-4-6 3 V 0.1...80 MHz conforming to Marine specification (LR, ABS, DNV, GL) 10 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) conforming to Marine specification (LR, ABS, DNV, GL)
<b>Electromagnetic Emission</b>	Conducted emissions - test level: 79 dB $\mu$ V/m QP/66 dB $\mu$ V/m AV ( power lines (AC)) at 0.15...0.5 MHz conforming to IEC 55011 Conducted emissions - test level: 73 dB $\mu$ V/m QP/60 dB $\mu$ V/m AV ( power lines (AC)) at 0.5...300 MHz conforming to IEC 55011 Conducted emissions - test level: 120...69 dB $\mu$ V/m QP ( power lines) at 10...150 kHz conforming to IEC 55011 Conducted emissions - test level: 63 dB $\mu$ V/m QP ( power lines) at 1.5...30 MHz conforming to IEC 55011 Radiated emissions - test level: 40 dB $\mu$ V/m QP class A ( 10 m) at 30...230 MHz conforming to IEC 55011 Conducted emissions - test level: 79...63 dB $\mu$ V/m QP ( power lines) at 150...1500 kHz conforming to IEC 55011 Radiated emissions - test level: 47 dB $\mu$ V/m QP class A ( 10 m) at 200...1000 MHz conforming to IEC 55011
<b>Immunity To Microbreaks</b>	10 ms
<b>Ambient Air Temperature For Operation</b>	-10...55 °C (horizontal installation) -10...35 °C (vertical installation)
<b>Ambient Air Temperature For Storage</b>	-25...70 °C
<b>Relative Humidity</b>	10...95 %, without condensation (in operation) 10...95 %, without condensation (in storage)
<b>Ip Degree Of Protection</b>	IP20 with protective cover in place
<b>Pollution Degree</b>	<= 2
<b>Operating Altitude</b>	0...2000 m
<b>Storage Altitude</b>	0...3000 m
<b>Vibration Resistance</b>	3.5 mm at 5...8.4 Hz on symmetrical rail 3.5 mm at 5...8.4 Hz on panel mounting 1 gn at 8.4...150 Hz on symmetrical rail 1 gn at 8.4...150 Hz on panel mounting

---

Shock Resistance 147 m/s<sup>2</sup> for 11 ms

## Packing Units

---

Unit Type Of Package 1	PCE
------------------------	-----

---

Number Of Units In Package 1	1
------------------------------	---

---

Package 1 Height	10.8 cm
------------------	---------

---

Package 1 Width	10.0 cm
-----------------	---------

---

Package 1 Length	12.6 cm
------------------	---------

---

Package 1 Weight	420.0 g
------------------	---------

---

Unit Type Of Package 2	S04
------------------------	-----

---

Number Of Units In Package 2	24
------------------------------	----

---

Package 2 Height	30 cm
------------------	-------

---

Package 2 Width	40 cm
-----------------	-------

---

Package 2 Length	60 cm
------------------	-------

---

Package 2 Weight	10.558 kg
------------------	-----------

---

Unit Type Of Package 3	P12
------------------------	-----

---

Number Of Units In Package 3	288
------------------------------	-----

---

Package 3 Height	105.0 cm
------------------	----------

---

Package 3 Width	120.0 cm
-----------------	----------

---

Package 3 Length	80.0 cm
------------------	---------

---

Package 3 Weight	132 kg
------------------	--------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

Rohs Exemption Information [Yes](#)

Pvc Free

## Certifications & Standards

**Reach Regulation** [REACH Declaration](#)

**Eu Rohs Directive** Pro-active compliance (Product out of EU RoHS legal scope)

**China Rohs Regulation** [China RoHS declaration](#)

**Environmental Disclosure** [Product Environmental Profile](#)


**Weee** The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

**Circularity Profile** [End of Life Information](#)

Dimensions Drawings

Dimensions


---

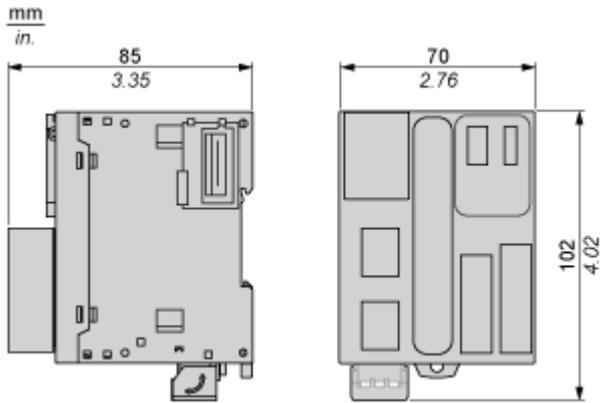


Mounting and Clearance

Mounting on a Rail

---

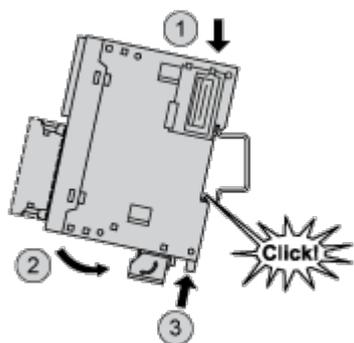

Direct Mounting on a Panel Surface

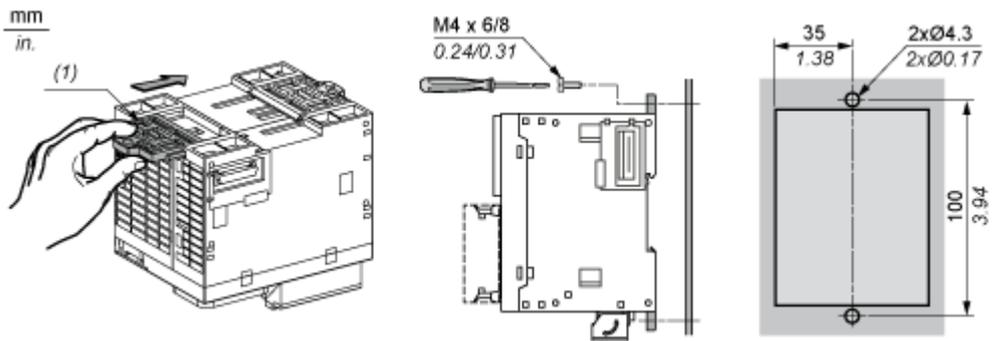


- (1) Install a mounting strip


**Mounting**

---


**Correct Mounting Position**

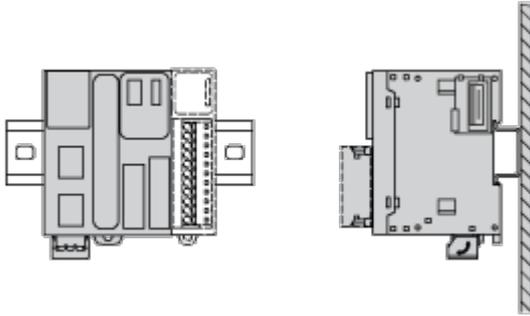

**Acceptable Mounting Position**

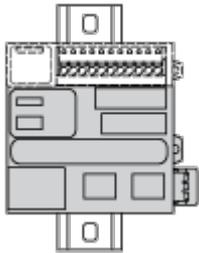


**Incorrect Mounting Position**

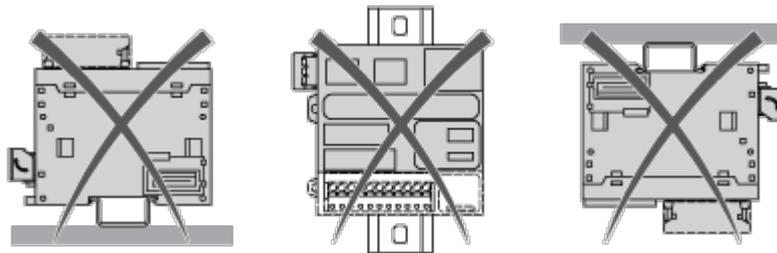

Clearance


---

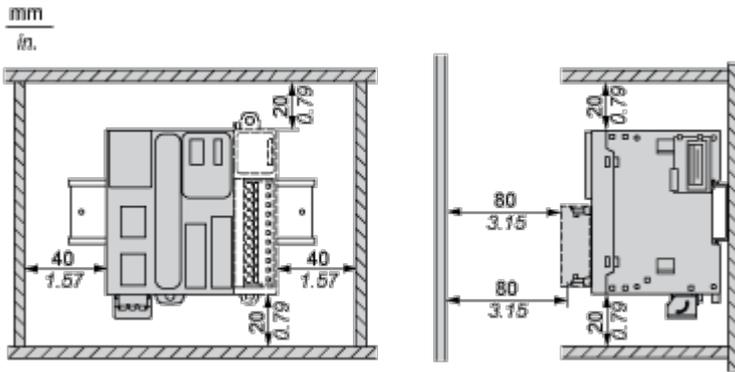

Connections and Schema

Digital Inputs


---

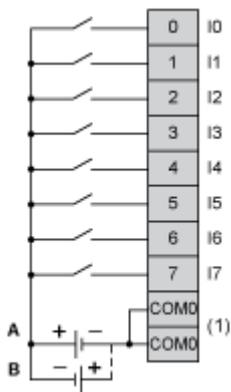

(1) The COM0 terminals are connected internally.


A : Sink wiring (positive logic).

B : Source wiring (negative logic).




Ix I0, I1, I6, I7

Digital Outputs

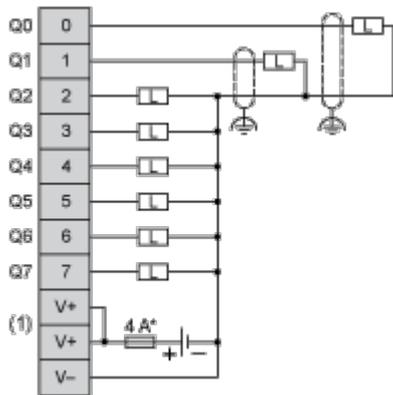



- (\*) Type T fuse
- (1) The V+ terminals are connected internally.



Qx Q0, Q1

Analog Inputs

---

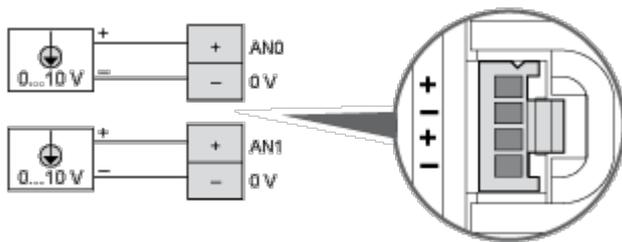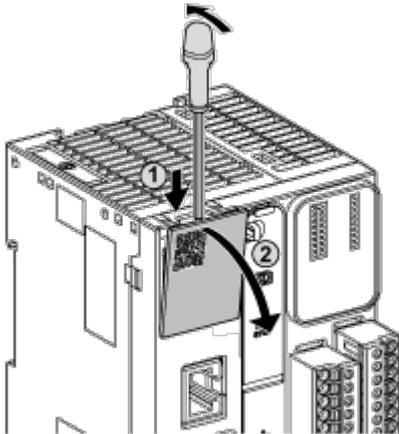


The (-) poles are connected internally.


Pin	Wire Color
AN0 / AN1	Red
0 V	Black

Ethernet Connection

---




Pin N °	Signal
1	TD+
2	TD-
3	RD+
4	-
5	-
6	RD-
7	-
8	-

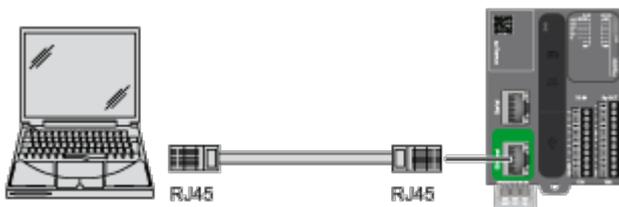


USB Mini-B Connection

---

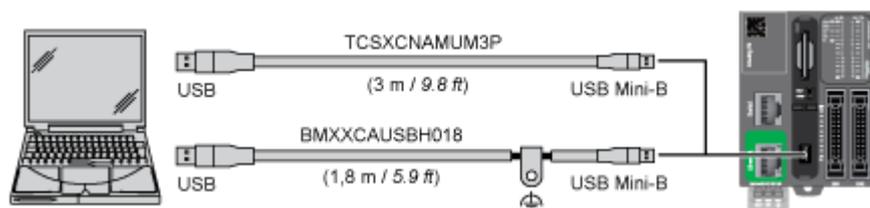

SL1 Connection




SL1

N °	RS 232	RS 485
1	RxD	N.C.
2	TxD	N.C.
3	RTS	N.C.
4	N.C.	D1
5	N.C.	D0
6	CTS	N.C.
7	N.C.*	5 Vdc
8	Common	Common

N.C.: not connected

\* : 5 Vdc delivered by the controller. Do not connect.

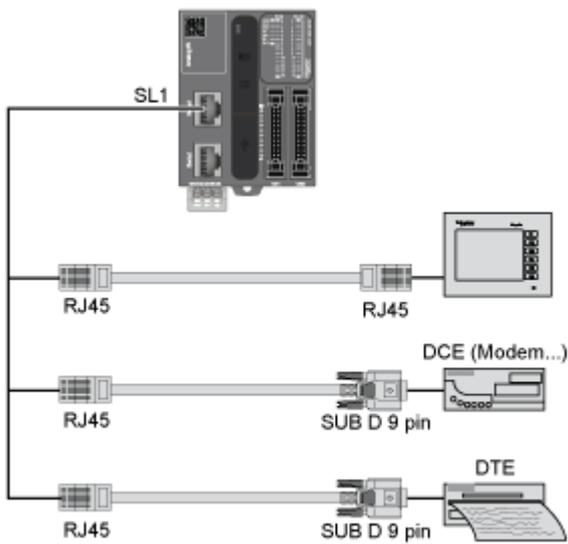


Performance Curves

Derating Curves

---


Embedded Digital Inputs

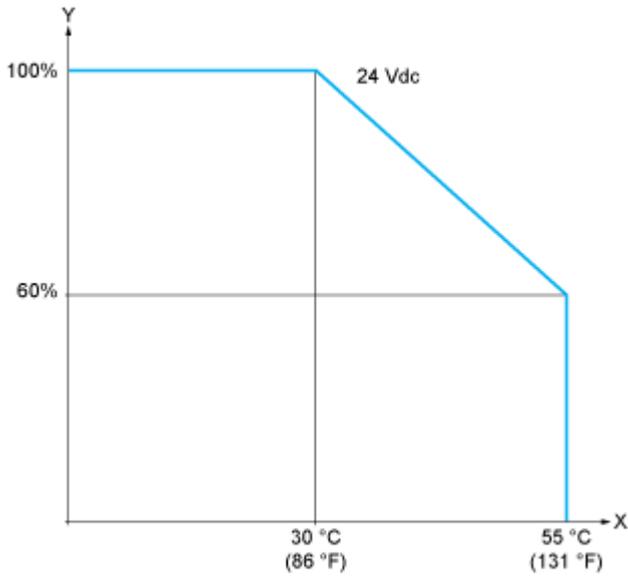

X : Ambient temperature

Y : Input simultaneous ON ratio

Embedded Digital Outputs

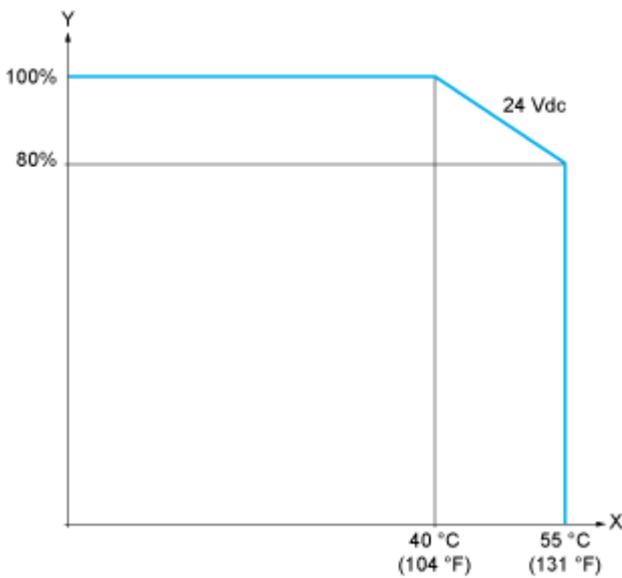

X : Ambient temperature

Y : Output simultaneous ON ratio