

Product data sheet

Specifications



3-phase control relay, Harmony
Control Relays, 8A, 2CO,
overfrequency and underfrequency,
208-480V AC

RMNF22TB30

Main

Range Of Product	Harmony Control Relays
Relay Type	Control relay
Product Or Component Type	NFC control relay
Network Number Of Phases	3 phases
Relay Name	RMNF22
Relay Monitored Parameters	Phase sequence Phase failure detection Overvoltage detection Undervoltage detection Overfrequency and underfrequency Asymmetry
Supported Os	Android
Software Version	V4.4 and above
App For Product	Zelio NFC (downloadable from Google Play store)
Product Compatibility	NFC enabled mobile device
Time Delay Type	Adjustable 0.1 s...1 min Tt- time delay upon fault
Switching Capacity In Va	2000 VA

Complementary

Nfc Operating Frequency	13.56 MHz
Maximum Rf Power Transmitted	0.0002 mW
Reset Time	1500 ms at maximum voltage
Maximum Switching Voltage	250 V AC
Minimum Switching Current	100 mA at 6 V
Maximum Switching Current	8 A AC
Supply Voltage Limits	166.4...576 V AC line to line 96...332.4 V AC line to neutral
Power Consumption In Va	4 VA at 480 V AC 60 Hz
On-Load Factor	100 %
Supply Voltage Frequency	50...60 Hz +/- 10 %
Output Contacts	2 C/O
Measurement Range	208...480 V AC
Setting Accuracy Of The Switching Threshold	+/- (1.5 % + 1 V)

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Setting Accuracy Of Time Delay	+/- 3 % for 10 s...60 min time delay range +/- 300 ms for 0...10 s time delay range
Hysteresis	3 % of fixed for phase failure detection
Alarm Threshold	166...576 V adjustable overvoltage and undervoltage detection (line to line) 96...332 V adjustable overvoltage and undervoltage detection (line to neutral) 5...150 V adjustable asymmetry 45...66 Hz adjustable overfrequency or underfrequency
Run-Up Delay At Power-Up Max	650 ms
Maximum Measuring Cycle	150 ms measurement cycle as true rms value
Threshold Adjustment Voltage	2...20 % of Un selected
Adjustment Of Asymmetry Threshold	2...20 % of Un selected
Repeat Accuracy	+/- 0.5 % for input circuit +/- 3 % for time delay
Setting Accuracy Of The Switching Threshold	+/- (1.5 % + 1 V)
Measurement Error	< 0.05 %/Hz with frequency variation < 0.05 %/°C with temperature variation
Response Time	<= 300 ms
Insulation Resistance	> 100 MOhm at 500 V DC conforming to IEC 60255-27
[Ui] Rated Insulation Voltage	400 V
[Uimp] Rated Impulse Withstand Voltage	4 kV during 1.2/50 µs
Dielectric Test Voltage	2.5 kV, 1 min AC 50 Hz conforming to IEC 60255-27
Mounting Position	Any position
Connections - Terminals	Screw terminals, 2 x 0.5...2 x 2.5 mm² (AWG 20...AWG 14) solid without cable end Screw terminals, 2 x 0.5...2 x 1.5 mm² (AWG 20...AWG 16) flexible with cable end Screw terminals, 1 x 0.5...1 x 3.3 mm² (AWG 20...AWG 12) solid without cable end Screw terminals, 1 x 0.5...1 x 2.5 mm² (AWG 20...AWG 14) flexible with cable end
Tightening Torque	0.6...1 N.m conforming to IEC 60947-1 0.60...0.99 N.m conforming to IEC 60947-1
Housing Material	Self-extinguishing plastic
Local Signalling	LED Un: (steady), green for power ON LED R1: (steady), amber for relay energised LED R1: (blinking), amber for timing in progress LED R2: (steady), amber for relay energised LED R2: (blinking), amber for timing in progress LED PL: (steady), red for alarm phase failure triggered LED PS: (blinking), red for alarm phase sequence failure triggered LED UV: (steady), red for alarm undervoltage failure triggered LED OV: (blinking), red for alarm overvoltage failure triggered LED UF: (steady), red for alarm underfrequency failure triggered LED OF: (blinking), red for alarm overfrequency failure triggered LED ASYM: (steady), red for alarm asymmetry failure triggered
Mounting Support	35 mm DIN rail conforming to IEC 60715
Electrical Durability	100000 cycles
Mechanical Durability	10000000 cycles
Utilisation Category	AC-15 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1 AC-1 conforming to IEC 60947-4-1 DC-1 conforming to IEC 60947-4-1
[Ith] Conventional Free Air Thermal Current	8 A
[Un] Rated Nominal Voltage	208...480 V AC 50/60 Hz, non self-powered 120...277 V AC 50/60 Hz, non self-powered
Contacts Material	Cadmium free

Control Type	Without test button
Width	22.5 mm
Height	90 mm
Depth	99 mm
Contacts Type And Composition	2 C/O
Net Weight	0.125 kg

Environment

Immunity To Microbreaks	10 ms
Electromagnetic Compatibility	<p>Voltage dips and interruptions immunity test - test level: 70 % (25/30 cycles) conforming to IEC 61000-4-11</p> <p>Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2</p> <p>Radiated radio-frequency electromagnetic field immunity test - test level: 10 V/m level 3 conforming to IEC 61000-4-3</p> <p>Immunity for industrial environments conforming to IEC 61000-6-2</p> <p>1 MHz damped oscillating wave - test level: 2.5 kV CM, 1 kV DM criteria B conforming to IEC 61000-4-18</p> <p>Voltage dips and interruptions immunity test - test level: 0 % (0.5...25 cycles) conforming to IEC 61000-4-11</p> <p>Magnetic field at power frequency - test level: 30 A/m (continuous)-300 A/m (1-3 s) level 4 conforming to IEC 61000-4-8</p> <p>Surge immunity test - test level: 2 kV level 4 (differential mode) conforming to IEC 61000-4-5</p> <p>Immunity for residential, commercial and light-industrial environments conforming to IEC 61000-6-1</p> <p>Voltage dips and interruptions immunity test - test level: 40 % (10/12 cycles) conforming to IEC 61000-4-11</p> <p>Voltage interruptions - test level: 0 % criteria C (250/300 cycles) conforming to IEC 61000-4-29</p> <p>Electrical fast transient/burst immunity test - test level: 4 kV criteria B (direct) conforming to IEC 61000-4-4</p> <p>Emission standard for industrial environments conforming to IEC 61000-6-4</p> <p>Surge immunity test - test level: 4 kV level 4 (common mode) conforming to IEC 61000-4-5</p> <p>Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2</p> <p>Conducted RF disturbances level 3 conforming to IEC 61000-4-6</p>
Standards	IEC 60255-1
Product Certifications	<p>CE</p> <p>UL</p> <p>CSA</p> <p>CCC</p> <p>EAC</p> <p>RCM</p>
Directives	<p>2014/30/EU - electromagnetic compatibility</p> <p>2014/35/EU - low voltage directive</p> <p>2014/53/EU - radio equipment directive</p>
Ambient Air Temperature For Storage	-40...70 °C
Ambient Air Temperature For Operation	-20...60 °C
Relative Humidity	93...97 % at 25...55 °C conforming to IEC 60068-2-30
Vibration Resistance	<p>0.075 mm (f= 10...58.1 Hz) not in operation conforming to IEC 60068-2-6</p> <p>1 gn (f= 58.1...150 Hz) not in operation conforming to IEC 60068-2-6</p> <p>0.035 mm (f= 10...58.1 Hz) in operation conforming to IEC 60068-2-6</p> <p>0.5 gn (f= 58.1...150 Hz) in operation conforming to IEC 60068-2-6</p>
Shock Resistance	<p>15 gn (duration = 11 ms) for not in operation conforming to IEC 60068-2-27</p> <p>5 gn (duration = 11 ms) for in operation conforming to IEC 60068-2-27</p>
Ip Degree Of Protection	<p>IP20 (terminals) conforming to IEC 60529</p> <p>IP40 (housing) conforming to IEC 60529</p> <p>IP40 (front panel) conforming to IEC 60529</p>

Pollution Degree	3 conforming to IEC 60664-1 3 conforming to UL 508
Overvoltage Category	III conforming to IEC 60664-1 III conforming to UL 508

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	9.6 cm
Package 1 Width	2.5 cm
Package 1 Length	10.8 cm
Package 1 Weight	136.0 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	36
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	5.578 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	576
Package 3 Height	75 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	98 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Mercury Free


✓ Rohs Exemption Information [Yes](#)

Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings


Dimensions

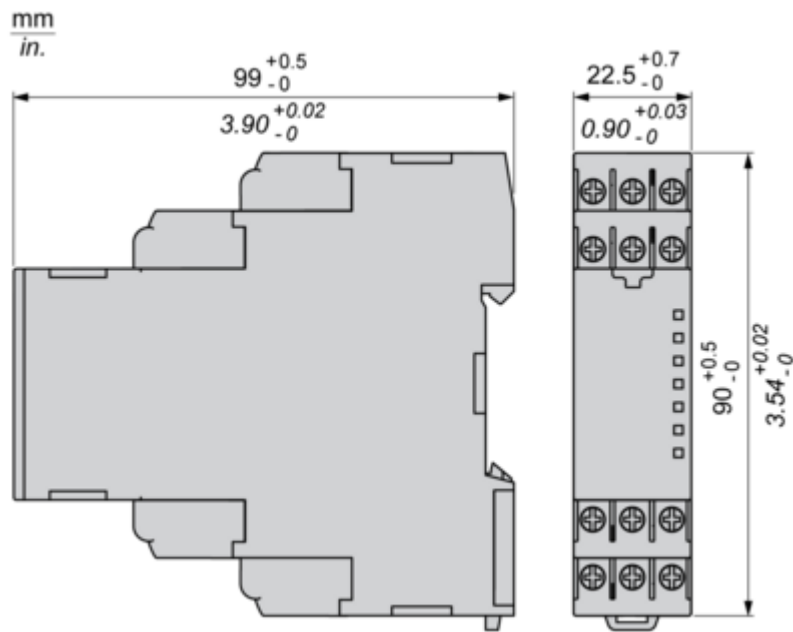

Mounting and Clearance


Mounting and Clearance

Rail Mounting

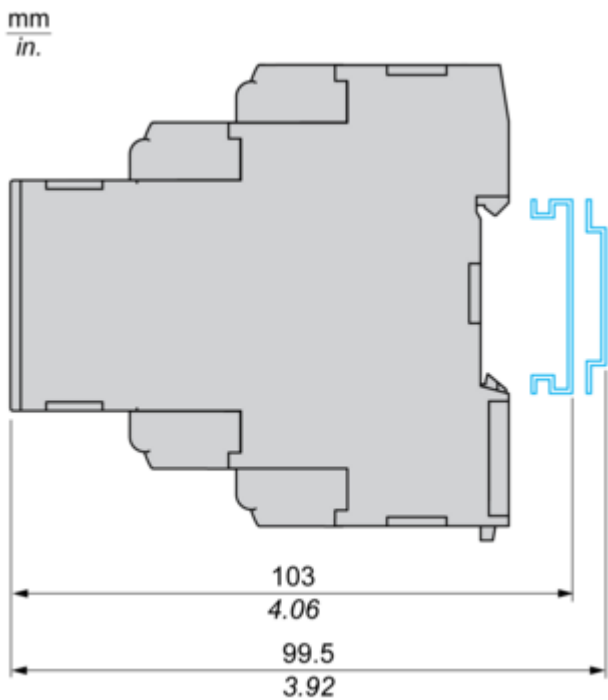

Connections and Schema

3-Phase Control Relay

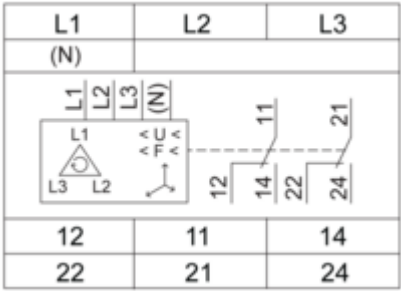


L1, L2, L3, (N) : Supply to be monitored (with or without neutral)
12, 11, 14 : 1st C/O contact of output relay
22, 21, 24 : 2nd C/O contact of output relay

Technical Description

Function Diagrams

Phase Loss and Phase Sequence

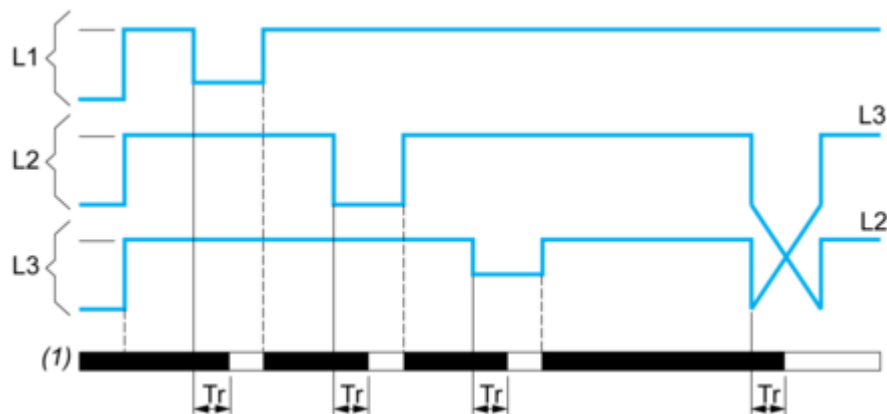


Tr : Response after crossing of threshold (< 300ms)
L1, L2, L3 : Phases of the supply voltage monitored
Alarm status:

- White color: Alarm triggered
- Black color: Alarm not triggered

(1) : Alarm

Overvoltage & Undervoltage

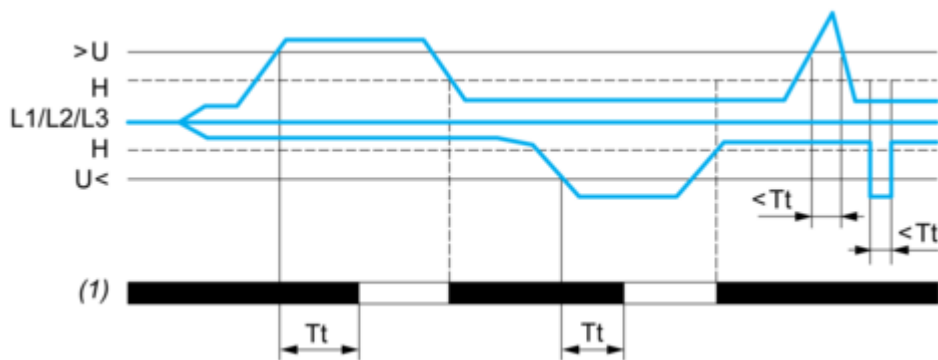


>U : Overvoltage threshold
H : Hysteresis
U< : Undervoltage threshold
L1, L2, L3 : Phases of the supply voltage monitored
Tt : Time delay after crossing of threshold (adjustable on app)
Alarm status:

- White color : Alarm triggered
- Black color : Alarm not triggered

(1) : Alarm

Asymmetry

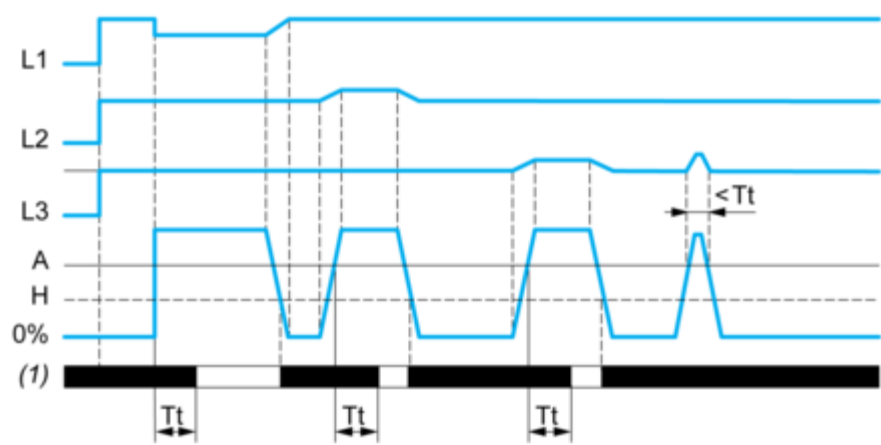


L1, L2, L3 : Phases of the supply voltage monitored
A : Asymmetry threshold (adjustable from 5...150V of the nominal supply voltage)
H : Hysteresis
Tt : Time delay after crossing of threshold (adjustable on app)
Alarm status:

- White color : Alarm triggered
- Black color : Alarm not triggered

(1) : Alarm

Over Frequency & Under Frequency

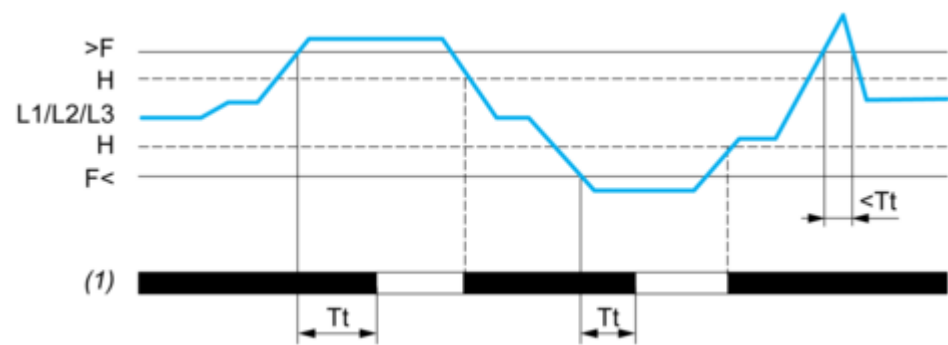

>F : Over frequency threshold
H : Hysteresis
F< : Under frequency threshold
L1, L2, L3 : Line frequency
Tt : Time delay after crossing of threshold (adjustable on app)
Alarm status:

- White color : Alarm triggered
- Black color : Alarm not triggered

(1) : Alarm